


Aluminium column SAL DP-58

diameter 125 mm at the base plate

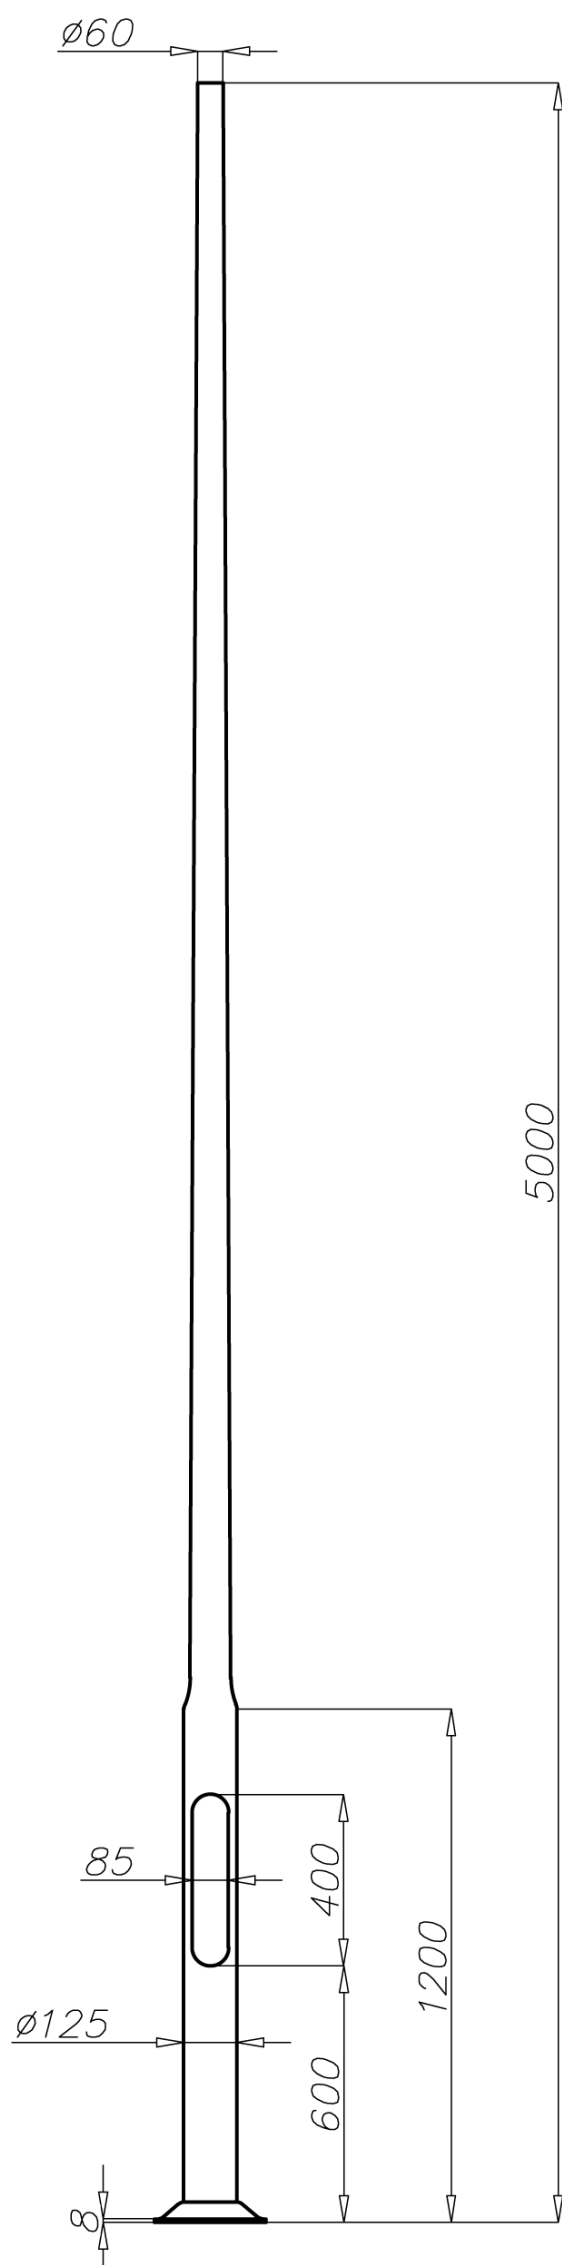

Technical data

Aluminium Column	SAL DP-58
Product code	42947
Column height H [m]	5
Wall thickness [mm]	3
Net weight [kg]	13,4
Volume [m ³]	0,145
Post top column	luminaires with Ø60 spigot entry with weight and windage not exceeding data in resistance calculations
Concrete footing / reinforcement basket	B-51 / Z-51
Concrete footing code / reinforcement basket code	311151 / 311251
Hot galvanized nut set / Hot galvanized ripable	4008 / 4009

Resistance calculations

SAL DP-58 code 42947	acceptable windage of luminaires and extension arms [m ²] for Cx=1,0			
	Vref. = 22 m-s	Vref. = 24 m-s	Vref. = 26 m-s	Vref. = 28 m-s
acceptable mass of a single luminaire [kg]	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
20	0,34	0,28	0,2	0,17

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- passive safety certificate 100NE2

