


Aluminium column SAL DL-2

diameter 120 mm at the base plate

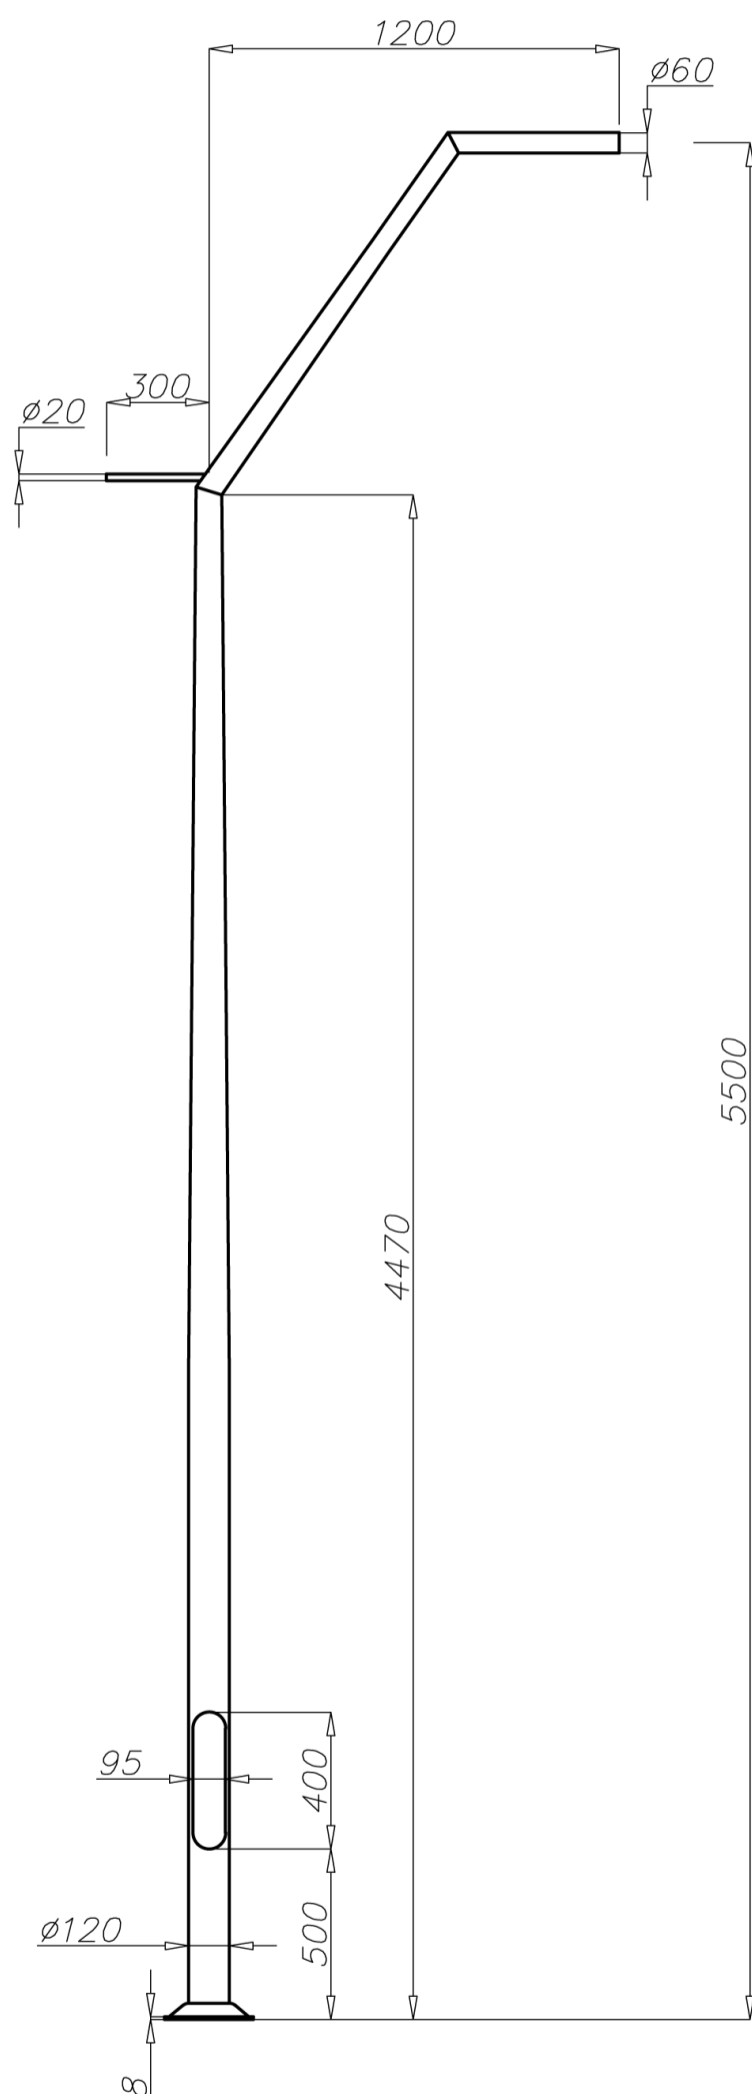

Technical data

Aluminium Column	SAL-DL2
Product code	42994
Column height H [m]	5,5
Wall thickness [mm]	4
Net weight [kg]	21,5
Volume [m ³]	0,714
Post top column	luminaires with $\varnothing 60$ spigot entry with weight and windage not exceeding data in resistance calculations
Concrete footing / reinforcement basket	B-51 / Z-51
Concrete footing code / reinforcement basket code	311151 / 311251
Hot galvanized nut set / Hot galvanized ripable nut set	4008 / 4009

Resistance calculations

SAL-DL2 code 42994	acceptable windage of single luminaire [m ²] for Cx=0,7			
	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
42996 karta SAL DL-4.pdf acceptable mass of luminaires [kg]	I zone, II location category	I and III zone, II location category to 450m AMSL	II zone, II location category	III zone, II location category to 755m AMSL
15	0,18	0,13	x	x

- surface: polished aluminium
- anodising in 10 colours, each with possibility of brightening
- option of powder painting in RAL colours (other colours available on request)
- elastomer protection option in the color of the column to a height of 350 mm (other height on request)
- ROSA standard wiring chamber
- packing: sleeve material
- passive safety certificate 100NE2

